


UCHWYTY TIG TTK

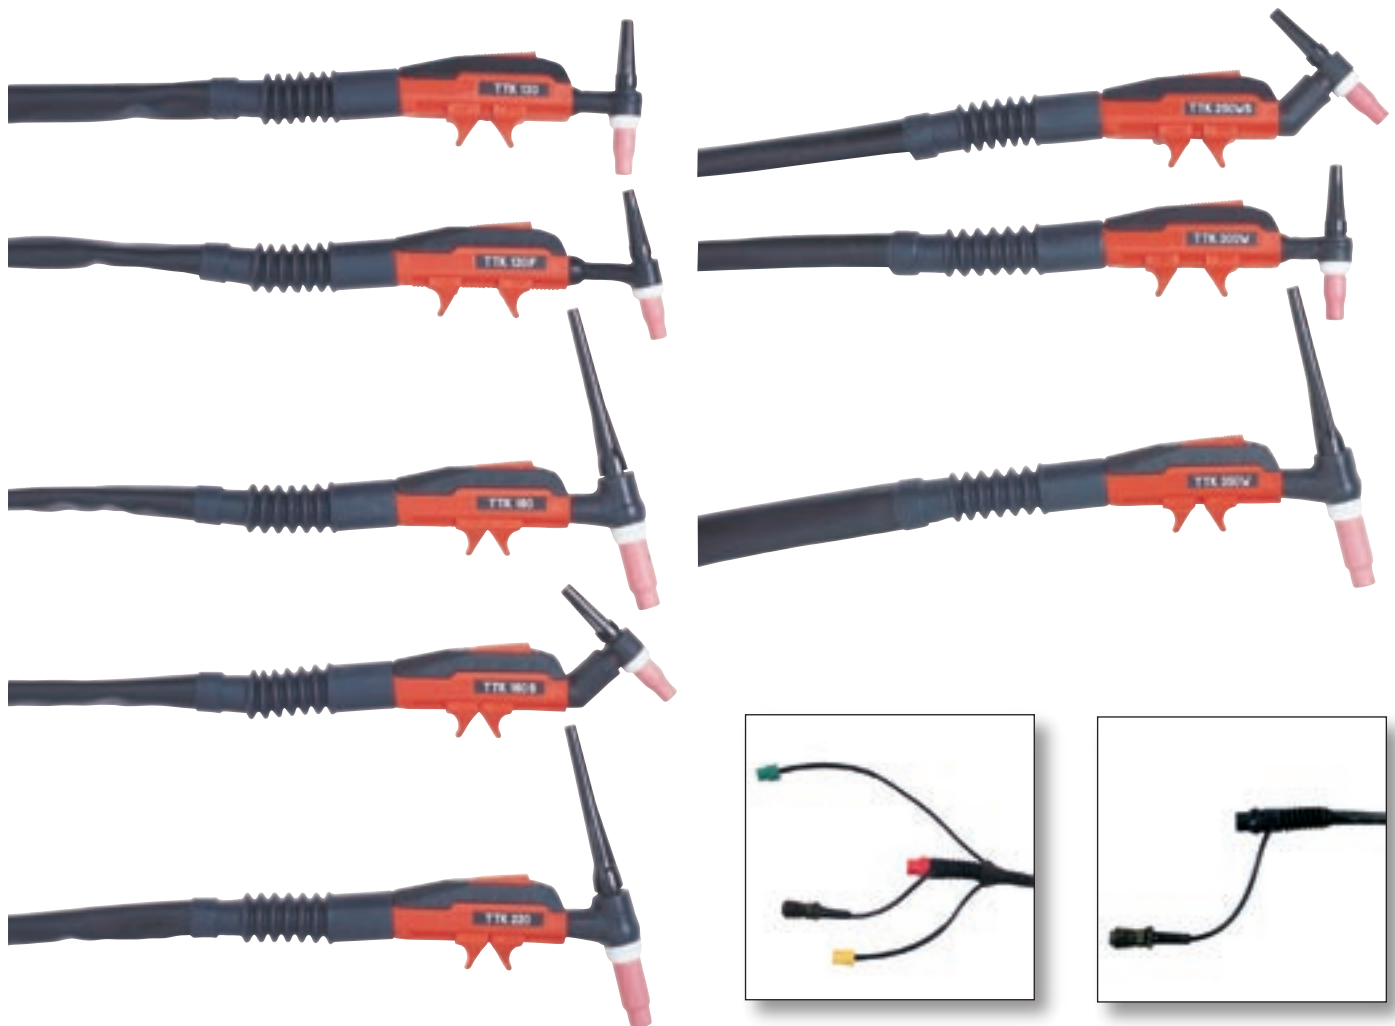

Dane Techniczne

		TTK 130	TTK 130F	TTK 160	TTK 160S	TTK 220	TTK 220S	TTK 300W	TTK 350W	TTK 250WS
Obciążalność	DC-40% ED	130A	130A	160A	160A	220A	220A	300A	350A	250A
	DC-100% ED	-	-	-	-	-	-	200A	250A	200A
	AC 40% ED	100A	100A	120A	110A	160A	120A	250A	300A	250A
	AC 100% ED	-	-	-	-	-	-	140A	200A	140A
Srednice elektrod	ø	1.0...2.4	1.0...2.4	1.0...2.4	1.0...2.4	1.0...3.2	1.0...3.2	1.0...2.4	1.0...4.0	1.0...4.0
Złącza	gaz/prąd	R $\frac{1}{4}$	R $\frac{1}{4}$	R $\frac{1}{4}$	R $\frac{1}{4}$	R $\frac{1}{4}$	R $\frac{1}{4}$	-	-	-
	woda/prąd	-	-	-	-	-	-	R $\frac{3}{8}$	R $\frac{3}{8}$	R $\frac{3}{8}$
	woda	-	-	-	-	-	-	R $\frac{3}{8}$	R $\frac{3}{8}$	R $\frac{3}{8}$
	gaz	-	-	-	-	-	-	R $\frac{1}{4}$	R $\frac{1}{4}$	R $\frac{1}{4}$
Długość / numer części	4 m	627063004	627063104	627066004	627066204	627072004	627072304	627080504	627085504	627075704
	8 m	627063008	627063108	627066008	627066208	627072008	627072308	627080508	627085508	627075708
	16 m	627063016	627063116	627066016	627066216	627072016	627072316	627080516	627085516	627075716